

FIG. 2A

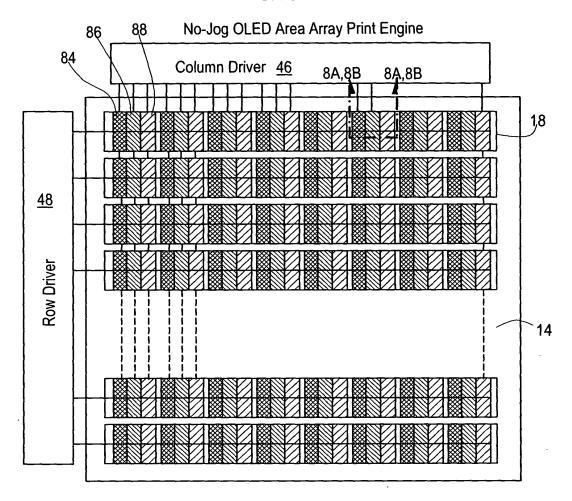
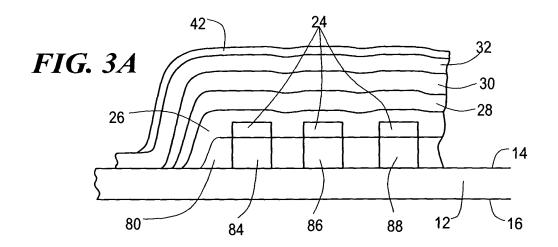
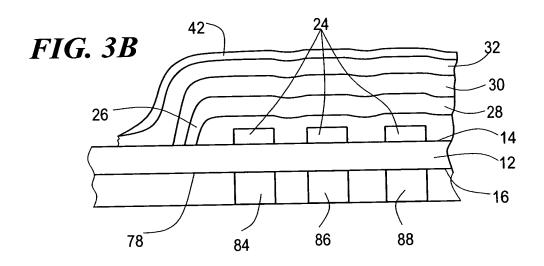
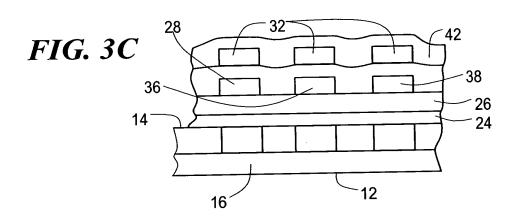
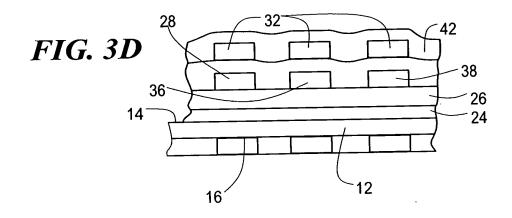


FIG. 2B









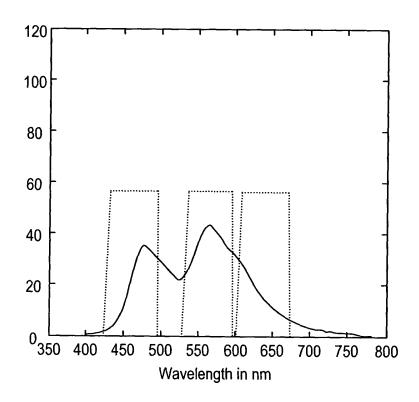


FIG. 4

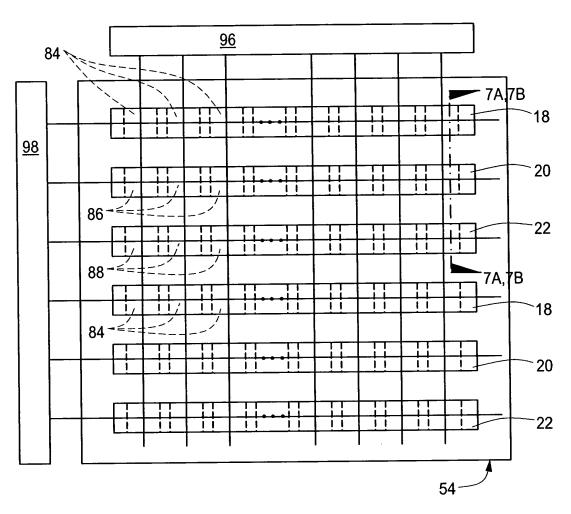


FIG. 5A

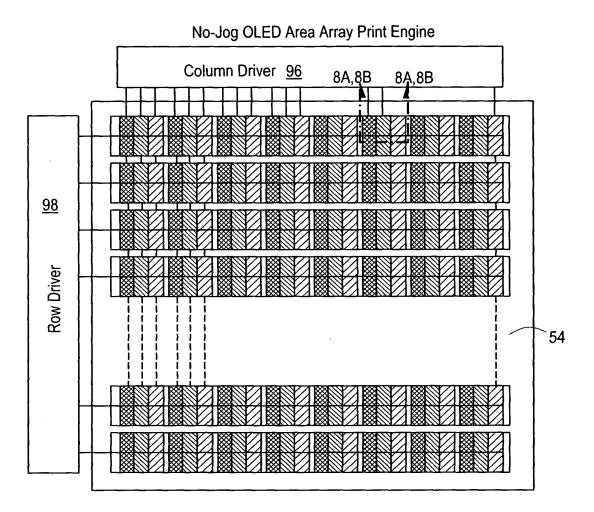
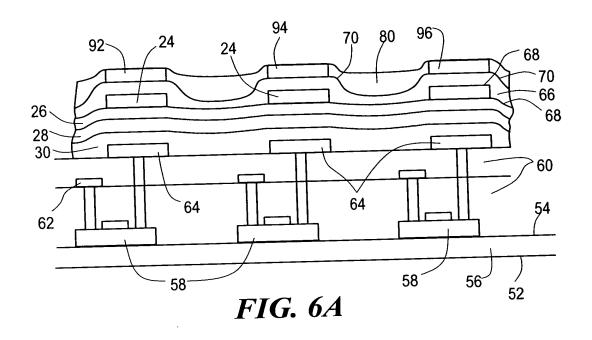
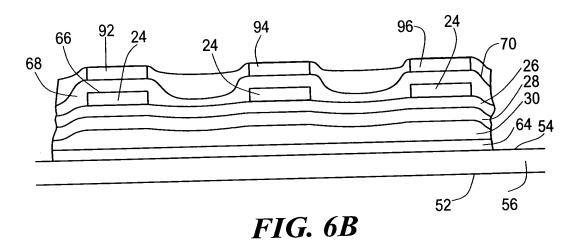


FIG. 5B





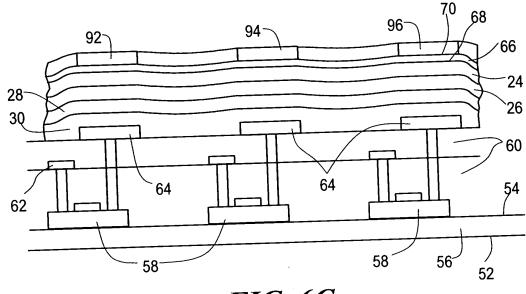


FIG. 6C

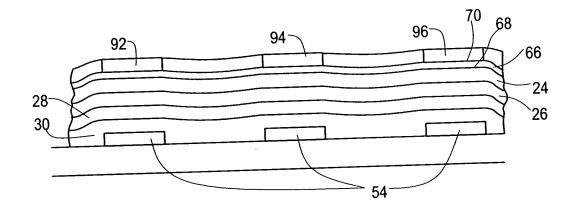


FIG. 6D

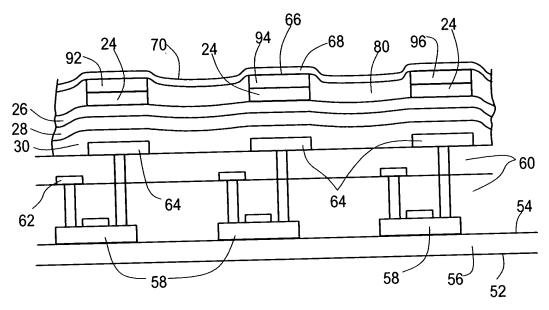


FIG. 6E

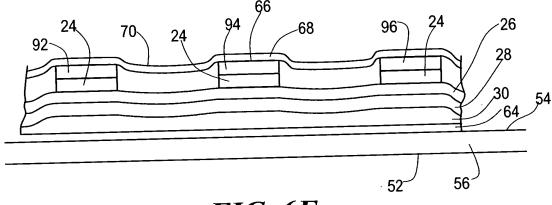


FIG. 6F

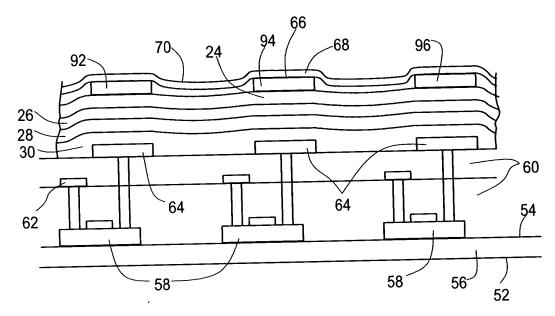


FIG. 6G

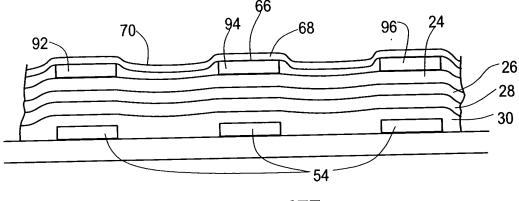


FIG. 6H

12/15

OLED Contact Print Engine

OLED Array with Air Gap

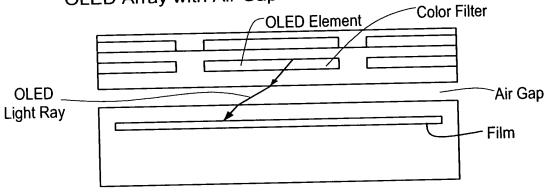


FIG. 7

Relative Intensity Profile on Film 1 with and without Air Gap Both the OLED and Film 1 Cover Sheet = 0.7mils (combined 1.4 mils)

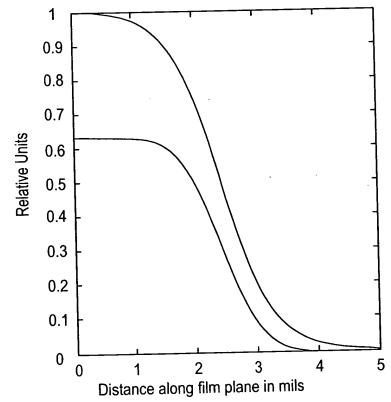


FIG. 8

Normalized Intensity Profile on Film 1 with and with No Air Gap Both the OLED and Film 1 Cover Sheet = 0.7mils (combined 1.4 mils)

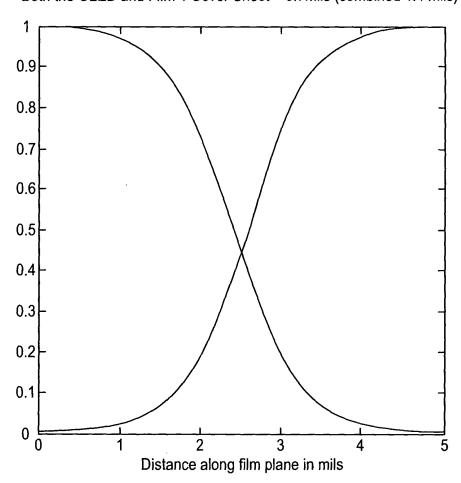


FIG. 9

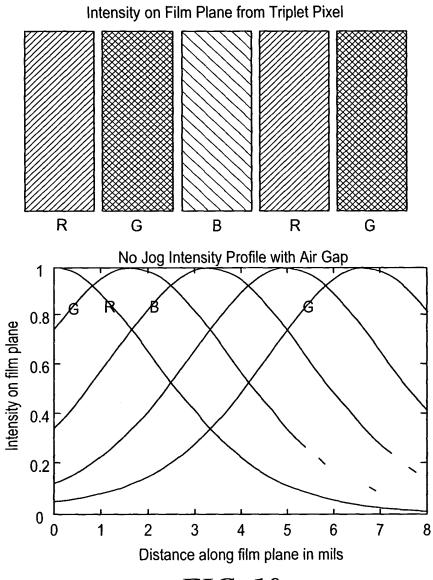


FIG. 10

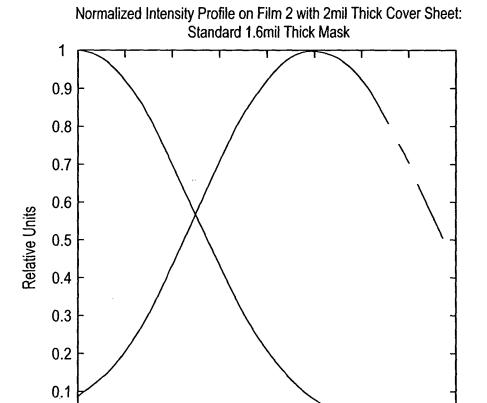


FIG. 11

Distance along film plane in mils